














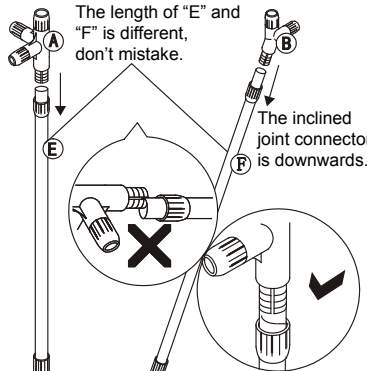
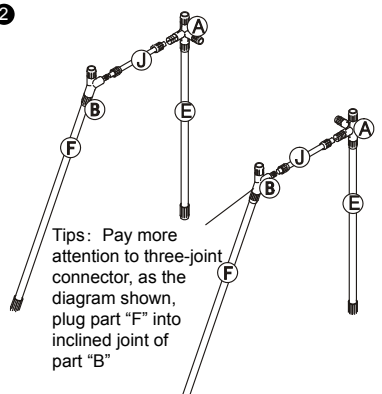
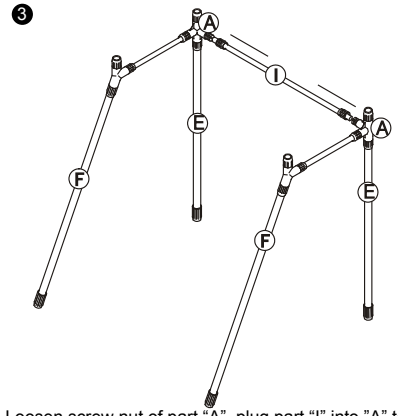
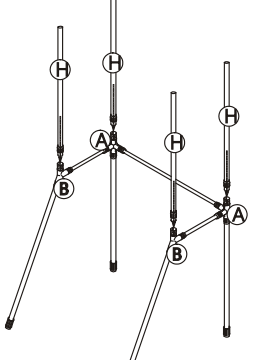
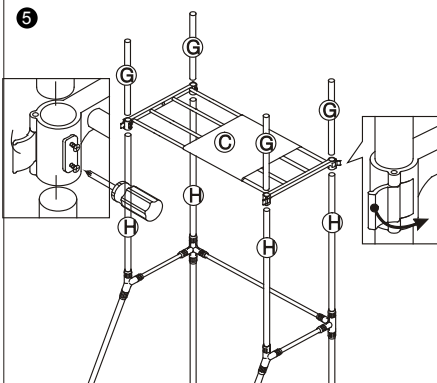
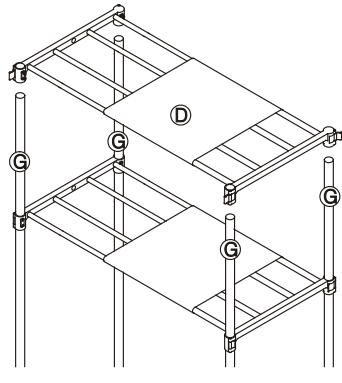
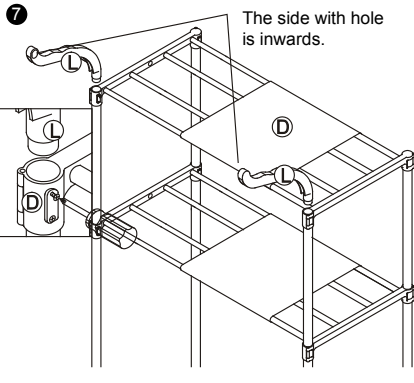
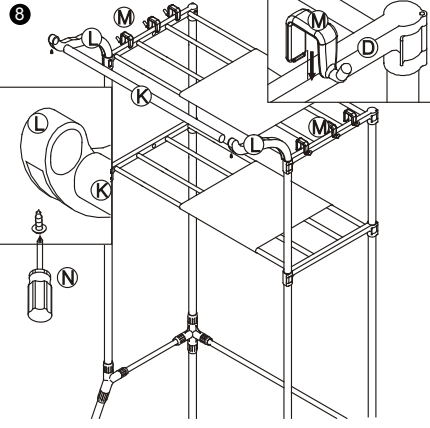
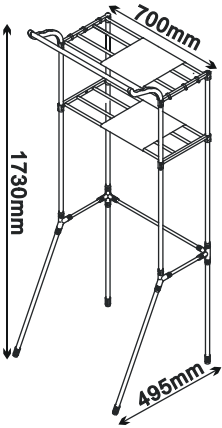


Instruction

SMS-BATH-004

Read the instruction carefully before using

PARTS								
A: Four-joint connector (2 PCS) 	B: Three-joint connector (2 PCS) 	C: Bottom shelf (1 PCS) 	D: Top shelf (1 PCS) 	E: Straight ground support pole (2 PCS) 				
F: Inclined ground support pole (2 PCS) 	G: Upside support pole (4 PCS) 	H: Downside support pole (4 PCS) 	I: Bottom cross-bar (1 PCS) 	J: Downside connecting pipe (2 PCS) 				
K: Top cross-bar (1 PCS) 	L: Curved bar (2 PCS) 	M: Hook (6 PCS) 	N: Screw (2 PCS) 	Screwdriver (1 PCS) 				
<p>1</p>  <p>The length of "E" and "F" is different, don't mistake. The inclined joint connector is downwards.</p> <p>Loosen screw nut of part "A", plug part "E" into "A" to the suitable position and then lock up. Loosen screw nut of part "B", plug part "F" into "B" to the suitable position and then lock up.</p>	<p>2</p>  <p>Tips: Pay more attention to three-joint connector, as the diagram shown, plug part "F" into inclined joint of part "B"</p> <p>Loosen screw nut of part "A" and "B", plug part "J" into "A" and "B" to the suitable position and then lock up.</p>	<p>3</p>  <p>Loosen screw nut of part "A", plug part "I" into "A" to the suitable position and then lock up.</p>	<p>4</p>  <p>Loosen screw nut of part "A" and "B", plug part "H" into "A" and "B" to the suitable position and then lock up.</p>	<p>5</p>  <p>Unlock the hasp of "C", insert "H", "G" into "C" to the suitable position, and then lock up the hasp and screws.</p>	<p>6</p>  <p>Unlock the hasp of "D", insert "G" into "D" to the suitable position, and then lock up the hasp and screws.</p>	<p>7</p>  <p>The side with hole is inwards.</p> <p>Unlock the hasp of "D", insert "L" into "D" to the suitable position, and then lock up the hasp and screws.</p>	<p>8</p>  <p>Insert "K" into "L" to the suitable position, and then lock up the screw, plug "M" into "D".</p>	<p>9</p>  <p>Finished diagram</p>

Remarks: 1. Pls put things in the scope of weight and pay much attention to the balance.

2. Don't put dangerous and credible goods on it.

3. Clean in wet cloth and wipe up in dry cloth.

4. Don't put in the high heat place.

5. No climbing for the children to prevent injuries.